
TINO
STONE & SURFACES

VERDE ALPI

Ficha Técnica

Technical details

VERDE ALPI

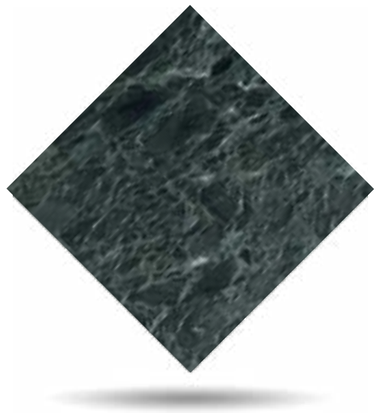

Verde Alpi es un mármol verde que encarna la riqueza de la naturaleza alpina. Su fondo verde bosque profundo se ve atravesado por vetas blancas y grises que recorren la piedra como ríos de agua helada sobre un terreno montañoso. Este contraste entre la oscuridad saturada del verde y la pureza de las vetas genera un dramatismo elegante, nunca recargado. En algunas piezas, el veteado se ramifica y dibuja patrones que recuerdan mapas de cordilleras o grietas en el hielo

Alpi Green is a green marble that embodies the richness of alpine nature. Its deep forest-green background is crossed by white and gray veins that flow across the stone like icy rivers over mountainous terrain. This contrast between the saturated darkness of the green and the purity of the veins creates an elegant, never excessive drama. In some slabs, the veining branches into patterns reminiscent of mountain range maps or ice fissures.



TAMAÑOS
SIZES

Los tamaños se pueden adaptar a los requisitos de cada proyecto. El grueso estándar son 2cm y el tamaño máximo para este grueso es 240x140cm. Para otros grosores, compruebe los tamaños disponibles.
Límites de tolerancia dimensional según norma UNE-EN 12058 y UNE-EN 1341.

The sizes can be adapted to the requirements of each project. The standard thickness is 2cm and the maximum size for this thickness is 240x140cm.
For other thicknesses, check available sizes.
Dimensional tolerance limits according to UNE-EN 12058 and UNE-EN 1341.

Acabados estandard:
Standard finishes:

PULIDO *POLISHED*
APOMAZADO *HONED*
DOMUS *DOMUS*
ARENADO *SANDED*

PROPIEDADES FÍSICO-MECÁNICAS
PHYSICO-MECHANICAL PROPERTIES

PROPIEDADES *PROPERTIES*	**ESTÁNDAR** *STANDARD*	**VALOR** *VALUE*
Absorción de Agua *Water Absorption*	UNE EN 13755	0.3%
Resistencia a la Flexión *Flexural Strength*	UNE EN 12372	20 Mpa
Resistencia a la Abrasión *Abrasion resistance*	UNE EN 14157	37 mm
Densidad *Density*	UNE EN 1936	26 g/cm^3
Resitencia a la Compresion *Compressive Strengt*	UNE EN 1926	1945 kg/cm^3

La información técnica incluida en este documento se ha obtenido a partir de uno o varios ensayos normalizados. Los valores pueden variar en pruebas posteriores debido a la variación de la piedra natural, ya que se trata de un producto obtenido de la naturaleza.

Technical information included in this document has been obtained from one or several standardized tests. Values may vary in later tests due to natural stone variation, as it is a product obtained from nature.

USOS RECOMENDADOS
RECOMMENDED USES

	RESIDENCIAL *RESIDENCIAL*	COMERCIAL *COMMERCIAL*
Revestimientos Interiores *Interior Cladding*	✓	✓
Revestimientos Exteriores *Exterior Cladding*	✓	✓
Pavimentos Interiores *Interior Flooring*	✓	CONSULTAR *CHECK*
Pavimentos Exteriores *Exterior Flooring*	✓	CONSULTAR *CHECK*
Encimeras *Countertops*	CONSULTAR *CHECK*	CONSULTAR *CHECK*
Otros *Others*	CONSULTAR *CHECK*	CONSULTAR *CHECK*

***CONSULTAR:** El uso podría estar permitido. Sería necesario más detalles sobre los proyectos.
***CHECK:** *Use could be permitted. It would be necessary more details about the projects*

TINO
STONE & SURFACES

TINO ha completado más de 600 proyectos con clientes de todo el mundo.

TINO has completed more than 600 projects with customers around the world.

TINO
STONE & SURFACES

CONTÁCTANOS
CONTACT US

www.tinostone.com

info@tino.es

MARBELLA

(+34) 952 906 149
Ctra. Na. 340. Km 175 Río Verde
Puerto Banús 29660